










FA 20 102 XX

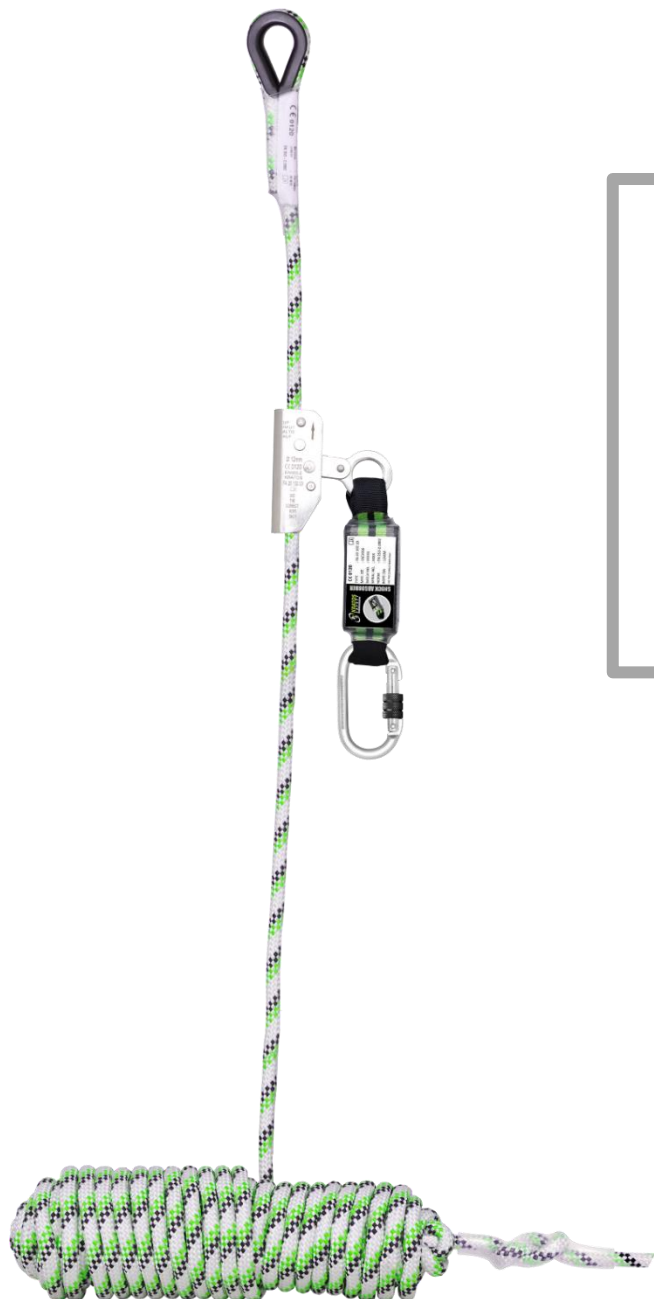


HS CODE
73269099
CARTON SIZE / PCS.
FA 20 102 10 : 80 x 40 x 24 cm / 10 FA 20 102 15 : 80 x 40 x 24 cm / 5 FA 20 102 20 : 80 x 40 x 24 cm / 5 FA 20 102 30 : 80 x 40 x 24 cm / 5 FA 20 102 40 : 80 x 40 x 24 cm / 3 FA 20 102 50 : 80 x 40 x 24 cm / 3
AET N°2777/10862-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16012-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom




REF.	FA 20 102 XX
 <p>LG. KG</p>	10m 15 m 20 m 30 m 40 m 50 m
CE	EN 353-2:2002
MAT.	 SNOX / PES Ø 12 mm
	NO
	
R(kN)	15 kN
	1.65 kg 2.45 kg 2.80 kg 3.80 kg 4.60 kg 5.55 kg



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Coulisseau doté d'un point fixe
 Rope grab with a fixed point lock
Corredera provista de punto fijo
 Guida a punto fisso
Gleitelement mit Festpunkt



Matière connecteur
 Material of connector
Material conector
 Materiale connettore
Material des Verbinders